


UNPAVED AND FUTURE PAVED AREAS

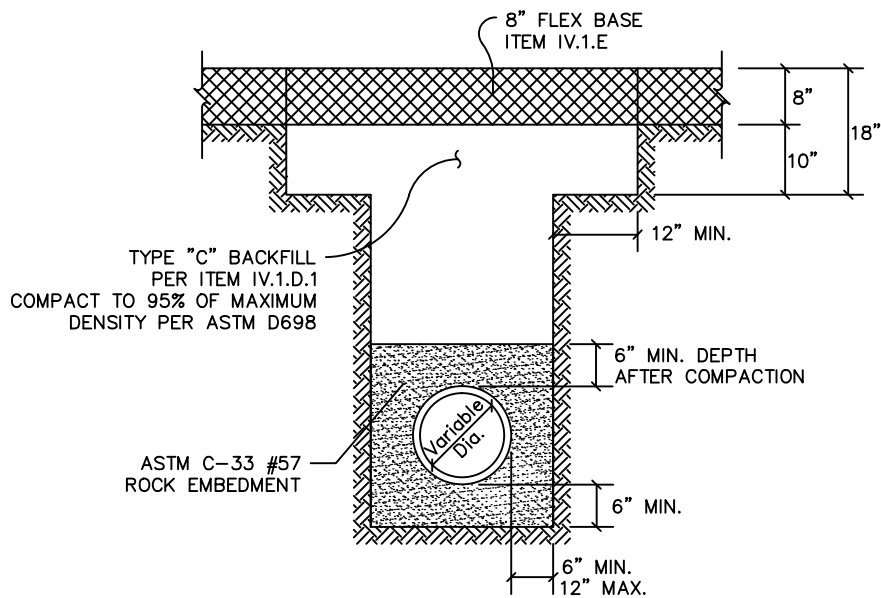

EXISTING FLEXBASE SURFACE

NOTES:

1. AT THE END OF EACH WORK DAY, ALL SPOILS SHALL BE REMOVED FROM THE TOWN R.O.W. UNLESS PRIOR WRITTEN PERMISSION IS OBTAINED FROM THE TOWN TO STORE SPOILS IN DESIGNATED SPOIL STORAGE AREAS THAT DO NOT OBSTRUCT AUTOMOBILE OR PEDESTRIAN TRAFFIC.
2. A MAXIMUM OF 300-FT OF OPEN TRENCH WILL BE ALLOWED AT ANY TIME, UNLESS APPROVED BY THE TOWN ENGINEER.
3. ALL PAVEMENT PATCHES SHALL BE REMOVED ALONG NEAT SAW CUT LINES.
4. IN SANDY SOILS A CRUSHED ROCK EMBEDMENT GRADE 8 PER ITEM IV.1.B SHALL BE USED IN LIEU OF ASTM C-33 #57 AND SHALL BE WRAPPED IN A FILTER FABRIC.

